


CROSS-FLOW / TANGENTIAL TYPE AIR CURTAIN

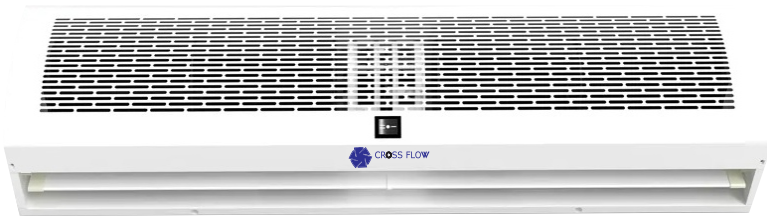


**FITTED WITH
CROMPTON GREAVES
COPPER MOTOR**

LARGE WIND AIR CURTAIN STRONG WIND AND EFFICIENT BARRIER

MOTOR

Its adopt the technology of electrical machinery its runs smoothly with powerful air-flow it operates reliably. And runs safely for 5000 Consecutive hours.



FAN WHEEL

The unique birthplace flows the wind wheel air flue design, Uses the high accuracy ABS manufacture: can the high speed transient equilibrium low noise revolution.



COMFORT SYSTEM

Maintaining a constant internal environment, a comfortable temperature is ensured whilst the air is kept fresh.



AVAILABLE IN SINGLE & THREE PHASE

Suitable For Height Upto 12 Feet

Model	Dimension (MM)	Frequency (Hz)	Voltage (V~)	Input Power (W)	Air Volume (M ³ /H)	Air Velocity (M/S)	Noise
CFI-1706	600×220×240	50	230/415	330	1400	15-17	<55
CFI-1709	900×220×240	50	230/415	410	2100	15-17	<55
CFI-1710	1000×220×240	50	230/415	410	2400	15-17	<56
CFI-1712	1200×220×240	50	230/415	490	2900	15-17	<57
CFI-1715	1500×220×240	50	230/415	610	3600	15-17	<58
CFI-1718	1800×220×240	50	230/415	860	4400	15-17	<59
CFI-1720	2000×220×240	50	230/415	1030	5000	15-17	<62

* Technical specification is subject to change because regular changes made in R&D